



# PRODUCT DATASHEET

## DLX™

### SELF-REGULATING HEAT TRACING

#### APPLICATION

DLX protects small and medium diameter pipes from rupture and leakage caused by freezing conditions in light industrial and commercial applications.

#### EASY TO INSTALL

Parallel circuitry allows DLX to be cut to suit any length required in the field. Flexible materials and small cross-section provide an excellent bending radius for wrapping around complex geometries.

#### ENERGY EFFICIENT

The heat output of DLX varies along the length of the traced equipment or surface, providing the optimal heating for colder or warmer spots. As the temperature drops, heat output increases. Conversely, when the temperature increases, heat output decreases

#### SAFE

DLX self-regulates to prevent overheating, even when overlapped. Trace heaters are CE marked for ordinary (non-classified) areas.

#### RELIABLE

Built with proven and proprietary compounding, extrusion, and cross-linking technology, DLX allows for continuous operation and extended life expectancy.

#### RATINGS

Available Watt densities ..... 9, 18 W/m at 10°C  
 Nominal supply voltage <sup>1</sup> ..... 230 Vac  
 Maximum maintenance temperature... 65°C (149°F)  
 Maximum continuous exposure temperature  
 Power-off.....85°C (185°F)  
 Minimum installation temperature ..... -60°C (-76°F)  
 Minimum bend radius  
 @ -15°C (59°F) .....10 mm (3/8")  
 @ -60°C (-76°F).....32 mm (1-1/4")  
 Maximum Circuit Length  
 @ 10°C (50°F) .....130 m (427')


#### BASIC ACCESSORIES

Thermon offers system accessories designed specifically for rapid, trouble-free installation of Thermon heat tracing.

All trace heaters require a connection kit to comply with approval requirements. Information on accessories to complete a heater circuit installation can be found in the "Freeze Protection Systems Accessories" product specification sheet (Form CPD1017U).

#### Notes

- Trace heater may be energised at other voltages; contact Thermon for design assistance.
- Circuit breaker sizing and earth-fault protection should be based on applicable local codes. Earth-fault protection of equipment should be provided for each branch circuit supplying electric heating equipment. Contact Thermon for assistance with circuit breaker sizing.

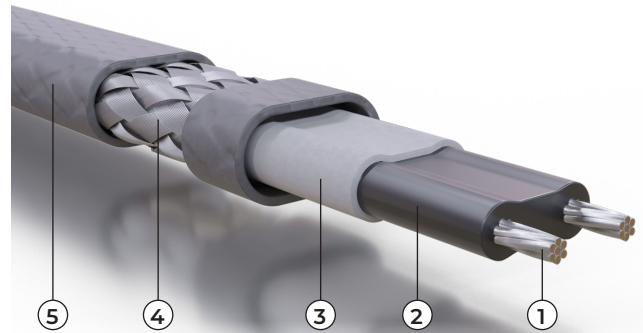


#### CONSTRUCTION

- Nickel-plated copper bus wires 0.6 mm<sup>2</sup> (20 AWG)
- E-Beam cross-linked semiconductive heating matrix
- E-Beam cross-linked dielectric insulation
- Tinned copper braid
- Polyolefin overjacket provides additional protection to core, insulation, and braid where exposure to aqueous inorganic chemicals is expected.

#### POWER OUTPUT CURVES

The power outputs shown apply to trace heater installed on insulated metallic pipe (using the procedures outlined in IEC 62395-1) at the service voltages stated below. For use on other service voltages, contact Thermon.

Product Type 230 Vac Nominal	Power Output at 10°C (50°F) W/m
DLX 3-2	9
DLX 6-2	18

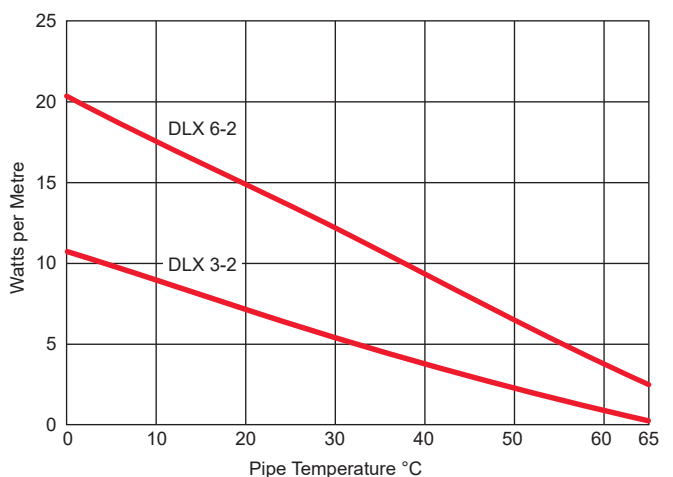

#### CERTIFICATIONS/APPROVALS

