



PRODUCT SPECIFICATIONS

# TubeTrace® Type SP/MP

## “HEAVY” STEAM TRACED INSTRUMENT TUBING

### APPLICATION


Freeze protection or process temperature maintenance with a tube temperature range: 40°F (5°C) to 400°F (205°C). Designed to provide freeze protection or temperature maintenance for metallic and non-metallic tubing with “heavy” steam trace, TubeTrace Type SP/MP is suitable for use with process analyzers, emissions analyzers, and impulse lines to flow or pressure transmitters where steam or hot liquid is the preferred heating media.

TubeTrace Type SP/MP “heavy” steam trace is a metallic tracer tube that is in direct contact with the process tube(s). The tracer tube and process tube(s) are cabled together thereby mechanically binding the tubes. This ensures consistent heat transfer and performance along the entire length by preventing separation or tube migration within the bundle.

Unlike field fabricated and insulated tubing, TubeTrace engineered pre-insulated tubing provides superior weather proofing and long term reliability.

### RATINGS

SP and MP “Heavy” Trace	Ratings
Available Tracer Tube Diameters	1/4”, 3/8” and 1/2”
Available Tracer Tube Materials	Copper and Stainless Steel
Typical Process Tube Temperature	40°F to 400°F (5°C to 205°C)
Maximum Steam Temperature	400°F/235 psig (205°C/1690 kPa)
Typical Temperature Difference Tracer Tube vs. Process Tube	Less Than 25°F (14°C) <sup>4</sup>

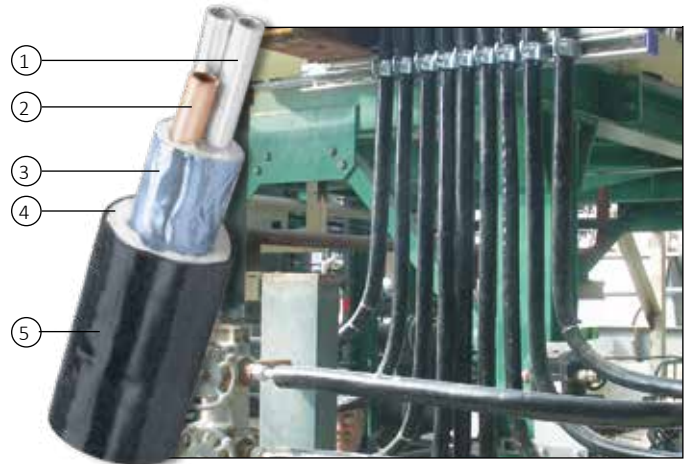

### CONSTRUCTION

- 1 Process tube(s)
- 2 Tracer tube
- 3 Heat reflective tape
- 4 Non-hygroscopic glass fiber insulation
- 5 Polymer outer jacket

### PRODUCT FEATURES

- Consistent heat transfer and thermal performance
- Superior weather proofing
- Long coils minimize waste

### HOW TO SPECIFY

