

KS-2

Protection Sleeve

Product Specifications

Application . . .

Silicone Grommet/Protection Sleeve to protect heating cable from damage by sharp edges such as end plates of insulation cladding. The sleeve is supplied in 1 meter lengths and can be easily cut to size. The sleeve can be exposed to a maximum temperature of 250°C.


KS-2 protection sleeve is designed to protect the heater cable from potential mechanical damage such as sharp edges of metal cladding. Typical examples are where heater cable exits metal cladding at flanges or from pipe's and vessel's. The "C" shape profile allows the protective sleeve to be retrofitted to existing installations as well as being used on new work. KS-2 is cut to length with a knife or side cutters.

Physical Properties . . .

Tensile Mpa	9,2 N/mm ²
Tear Strength	21 N/mm
Elongation	260%
Oxygen Index	39%
Maximum working temperature	250°C

Specifications . . .

- Low Smoke
- Zero Halogen
- Silicone Rubber

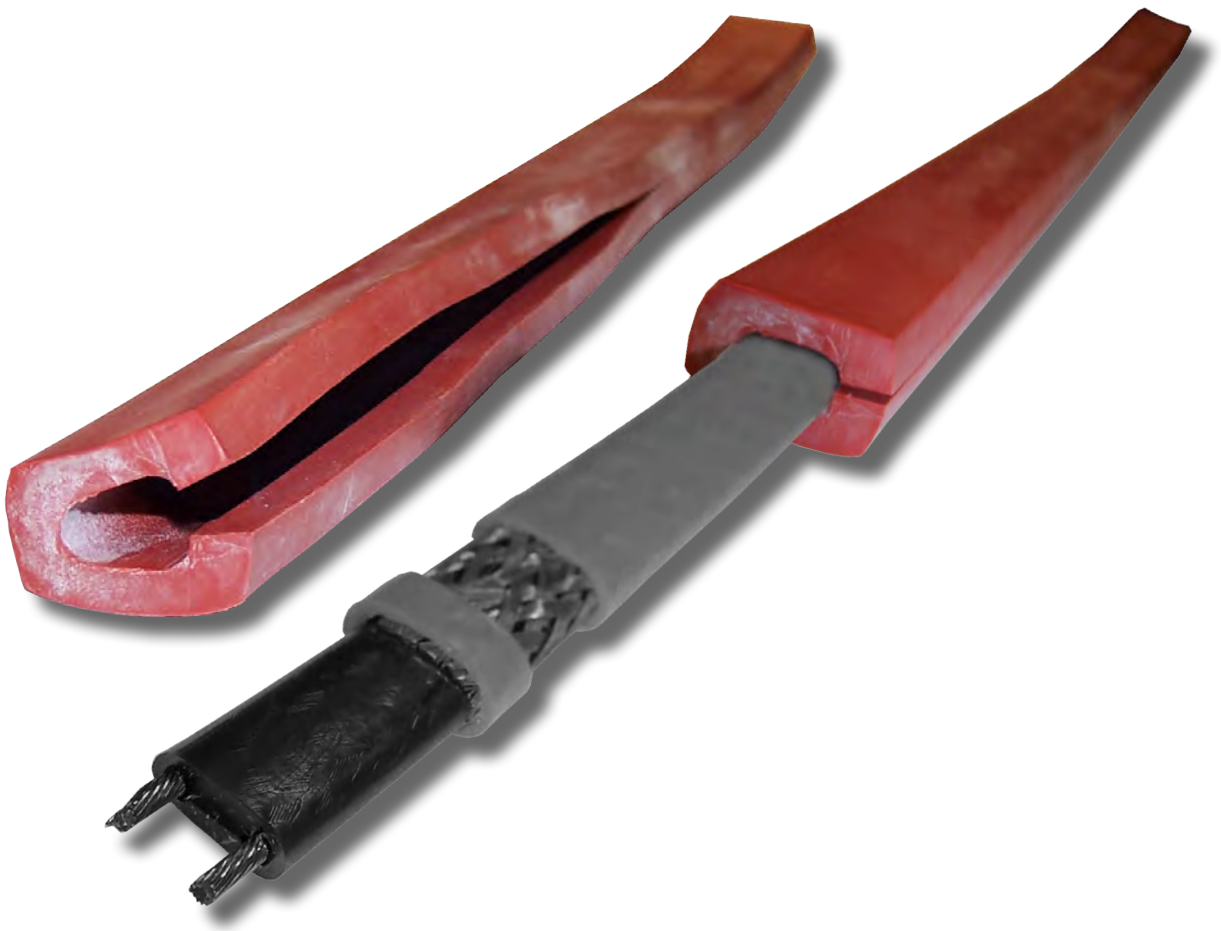

THERMON...The Heat Tracing Specialists®
www.thermon.com

tce Thermal Controls
and Electronics

TC-E B.V.
Nieuwland Parc 314c
2952 DD Alblasserdam
The Netherlands

+31 (0) 183 20 10 88
sales@tc-e.nl
www.tc-e.nl - www.heattrace.eu
Authorized Thermon distributor